



July 2, 2025

Mr. Jason Bing, RA, LEED AP
Director, Capital Programs
Ann Arbor Public Schools
2555 South State Street
Ann Arbor, MI 48104
BingJ@aaps.k12.mi.us

RE: AEG Project #AE250407
Radon Sampling Services
Ann Arbor Public Schools, Slauson Middle School

Dear Mr. Bing:

Pursuant to the request of Ann Arbor Public Schools, Arch Environmental Group, Inc. (AEG) placed short-term radon detectors throughout frequently occupied locations at ground level or lower throughout Slauson Middle School. The detectors were placed in the facility on June 24, 2025 and were retrieved on June 27, 2025. Samples were analyzed by Air Chek, Inc. located in Mills River, North Carolina.

I. Introduction

The U.S. Environmental Protection Agency (EPA) and other major national and international scientific organizations have concluded that radon is a human carcinogen and a serious environmental health problem. Radon is a naturally occurring radioactive gas. It comes from the natural breakdown (decay) or uranium which is found in soil and rock all over the United States. Radon travels through soil and enters buildings through cracks and other holes in the foundation. Eventually it decays into radioactive particles (decay products) that can become trapped in your lungs when you breathe. As these particles in turn decay, they release small bursts of radiation. The radiation can damage lung tissue and lead to lung cancer over the course of your lifetime. Radon is colorless, odorless, and tasteless. The only way to know whether or not elevated levels of radon are present in a location is to test.

There are two ways to test for radon:

1. A **short-term test** is the quickest test for radon. In this test the device remains in the room for a period of **2 to 90 days** depending on the device.
2. A **long-term test** remains in place for more than 90 days.

The EPA recommends that action should be taken when radon levels are found to be 4pCi/L (Pico Curies per Liter of air) or higher.

II. Sampling Analysis & Strategies

In an effort to determine the radon levels throughout frequently occupied areas at ground level or lower, Arch Environmental Group, Inc. deposited short-term, activated charcoal adsorption devices (AC) in eighty-six locations in Slauson Middle School.

Activated charcoal adsorption devices (ACs) are a passive detector system for the measurement of radon concentrations in the air. Once the detector is opened, radon gas diffuses passively onto the activated charcoal and radon concentration is determined. ACs are passive devices. The charcoal within these devices has been treated to increase its ability to adsorb gases. The passive nature of the activated charcoal allows continual adsorption and desorption of radon. During the entire measurement period (typically two to seven days), the adsorbed radon undergoes radioactive decay. AEG deposited the AC detectors on June 24, 2025. The detectors were placed between knee and shoulder height on a flat or hanging surface. Additionally, the detectors were placed at least 1 foot from exterior walls, 3 feet from windows or doors, away from direct sunlight and away from heat vents. After a designated time, the samples were retrieved on June 27, 2025; the AC detectors were closed and collected for laboratory analysis. Duplicate samples and blank samples necessary for quality assurance purposes were also collected at the facility.

As the sample results shown in *Attachment A* indicate, all samples identified radon concentrations below the EPA recommended “action level” of 4.0 pCi/L with sample results ranging from <0.3 pCi/L to 1.4 pCi/L. Prudent practice recommends that areas where radon levels are potentially above the “action level” should be retested with a second short-term test to confirm the results of the initial test. A second test above the “action level” recommends either progressing to a long-term test of at least 90 days or taking corrective measures to reduce levels below the “action level”.

III. Conclusions

Pursuant to the request of Ann Arbor Public Schools, Arch Environmental Group, Inc. collected radon samples from frequently occupied areas throughout Slauson Middle School. In accordance with the guidance document titled “Radon Measurements in Schools, Revised Edition (EPA 402-R-92-014, July 1993)” published by the U.S. Environmental Protection Agency, “...the EPA has conducted extensive research on the presence and measurement of radon in schools. Initial reports from some of those studies prompted the Administrator in 1989 to recommend that schools nationwide be tested for the presence of radon. Based on more recent findings, EPA continues to advise U.S. schools to test for radon and to reduce levels to below 4pCi/L.” Following some of the sampling recommendations offered by this guidance document, Arch Environmental Group, Inc.’s samples collected during this round were all determined to be below 4 pCi/L.

The EPA suggests that schools retest sometime in the future, especially after significant changes to the building structure or the HVAC system.

If you have any question regarding this information or work performed by Arch Environmental Group, Inc., please feel free to contact me at (248) 426-0165 ext. “330” [office] or (248) 252-3618 [mobile].

Sincerely,

HealthAIR
A Division of arch environmental group



Philip E. Grosse
Project Consultant III



Attachment A
Official Laboratory Results

Radon test result report for:**AAPS****SLAUSON MS**

Kit #	Room Id	Started	Ended	pCi/L	Analyzed
7531522	101 DUP	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531527	112 CAFE	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531526	116 CAFÉ	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531515	120 COPY	2025-06-24 @ 11:00 am	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531516	121A	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531517	121A FYR	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
11566192	136 OFFICE	2025-06-24 @ 11:00 am	2025-06-27 @ 10:00 am	< 0.3	2025-06-30
11566196	142 SHOP	2025-06-24 @ 11:00 am	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531535	1ST BSMT C	2025-06-24 @ 1:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531537	1ST CENTER	2025-06-24 @ 1:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531538	1ST E ST	2025-06-24 @ 1:00 pm	2025-06-27 @ 11:00 am	0.5 ± 0.3	2025-06-30
7531536	1ST W ST	2025-06-24 @ 1:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531560	200 COMMONS	2025-06-24 @ 3:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531554	200A	2025-06-24 @ 3:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531555	200B	2025-06-24 @ 3:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531556	200C	2025-06-24 @ 3:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531557	200D	2025-06-24 @ 3:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531558	200E	2025-06-24 @ 3:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531559	200F	2025-06-24 @ 3:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531563	203	2025-06-24 @ 3:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531568	205	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531561	208	2025-06-24 @ 3:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531562	208 DUP	2025-06-24 @ 3:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531571	211	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531572	211 DUP	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531569	216	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531570	218	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531578	222	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531579	224	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531581	226	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531582	226 DUP	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531583	228	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531584	230	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531585	232	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531580	234	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531586	240	2025-06-24 @ 4:00 pm	2025-06-27 @ 12:00 pm	0.5 ± 0.3	2025-06-30
7531587	242	2025-06-24 @ 4:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30

Radon test result report for:**AAPS
SLAUSON MS**

Kit #	Room Id	Started	Ended	pCi/L	Analyzed
7531588	244	2025-06-24 @ 4:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531589	246	2025-06-24 @ 4:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531590	248	2025-06-24 @ 4:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531575	6 RES	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531574	6/7 RES	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531577	7/8 RES	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531576	8 RES	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
11566191	ART 136	2025-06-24 @ 11:00 am	2025-06-27 @ 10:00 am	< 0.3	2025-06-30
11566193	ART 138	2025-06-24 @ 11:00 am	2025-06-27 @ 10:00 am	< 0.3	2025-06-30
7531591	AUD	2025-06-24 @ 4:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531592	AUD DUP	2025-06-24 @ 4:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531598	BLANK 1	2025-06-24 @ 4:00 pm	2025-06-27 @ 10:00 am	< 0.3	2025-06-30
7531599	BLANK 2	2025-06-24 @ 4:00 pm	2025-06-27 @ 10:00 am	< 0.3	2025-06-30
7531600	BLANK 3	2025-06-24 @ 4:00 pm	2025-06-27 @ 10:00 am	< 0.3	2025-06-30
7531601	BLANK 4	2025-06-24 @ 4:00 pm	2025-06-27 @ 10:00 am	< 0.3	2025-06-30
7531602	BLANK 5	2025-06-24 @ 4:00 pm	2025-06-27 @ 10:00 am	< 0.3	2025-06-30
7531539	BOILER RM	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	1.4 ± 0.3	2025-06-30
7531542	COAL DUP	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	0.9 ± 0.3	2025-06-30
7531541	COAL STOR	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	1.0 ± 0.3	2025-06-30
7531548	ELECTRICAL	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531547	FAN 115	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531573	ILC OFFICE	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
11566190	KILN ROOM	2025-06-24 @ 11:00 am	2025-06-27 @ 10:00 am	< 0.3	2025-06-30
7531530	KITCHEN	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531524	LOW GYM	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531532	M DR DUP	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531531	M. DRESS	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531597	M203	2025-06-24 @ 4:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531594	M206	2025-06-24 @ 4:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531595	M210	2025-06-24 @ 4:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531596	M212	2025-06-24 @ 4:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531528	MAIN CAFé	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531564	MC	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531567	MC BOOK	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531566	MC LOUNGE	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531565	MC STORAGE	2025-06-24 @ 3:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
7531549	MECH CAFé	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30

Radon test result report for:**AAPS****SLAUSON MS**

Kit #	Room Id	Started	Ended	pCi/L	Analyzed
7531551	MECH D3	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	0.6 ± 0.3	2025-06-30
7531552	MECH D3 DUP	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	0.6 ± 0.3	2025-06-30
7531534	MEN CUST	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531543	MEZZ	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531545	MEZZ E ST	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	1.0 ± 0.3	2025-06-30
7531550	MEZZ SE	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531544	MEZZ W ST	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	0.6 ± 0.3	2025-06-30
7531593	MUSIC OFF	2025-06-24 @ 4:00 pm	2025-06-27 @ 12:00 pm	< 0.3	2025-06-30
11566199	OFFICE DUP	2025-06-24 @ 11:00 am	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531546	P TRENCH	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531525	RECEIVING	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531523	ROOM 100	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531521	ROOM 101	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531520	ROOM 102	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531518	ROOM 103	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531519	ROOM 105	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531514	ROOM 120	2025-06-24 @ 11:00 am	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
11566195	ROOM 121	2025-06-24 @ 11:00 am	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
11566194	ROOM 124	2025-06-24 @ 11:00 am	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
11566200	ROOM 146	2025-06-24 @ 11:00 am	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531540	SE STORAGE	2025-06-24 @ 2:00 pm	2025-06-27 @ 11:00 am	0.8 ± 0.3	2025-06-30
7531529	SERVERY	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
11566198	SHOP OFF.	2025-06-24 @ 11:00 am	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
11566197	SHOP STO.	2025-06-24 @ 11:00 am	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531553	UPPER GYM	2025-06-24 @ 3:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30
7531533	WOM. CUST	2025-06-24 @ 12:00 pm	2025-06-27 @ 11:00 am	< 0.3	2025-06-30

Kit Number	Start Date	Start Time	End Date	End Time	Temperature	Facility	Building	Room	Project ID
7531514	2025-06-24	11:00 am	2025-06-24	11:00 am	70	AAPS	SLAUSON	ROOM 120	AE250407
7531515	2025-06-24	11:00 am	2025-06-24	11:00 am	70	AAPS	SLAUSON	120 COPY	AE250407
7531516	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	121A	AE250407
7531517	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	121A FYR	AE250407
7531518	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	ROOM 103	AE250407
7531519	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	ROOM 103	AE250407
7531520	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	ROOM 103	AE250407
7531521	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	ROOM 103	AE250407
7531522	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	101 DUP	AE250407
7531523	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	ROOM 100	AE250407
7531524	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	LOW GYM	AE250407
7531525	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	RECEIVING	AE250407
7531526	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	116 CAFÉ	AE250407
7531527	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	112 CAFE	AE250407
7531528	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	MAIN CAFÉ	AE250407
7531529	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	SERVERY	AE250407
7531530	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	KITCHEN	AE250407
7531531	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	M. DRESS	AE250407
7531532	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	M DR DUF	AE250407
7531533	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	WOM. CU	AE250407
7531534	2025-06-24	12:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	MEN CUS	AE250407
7531535	2025-06-24	1:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	1ST BSMT	AE250407
7531536	2025-06-24	1:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	1ST W ST	AE250407
7531537	2025-06-24	1:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	1ST CENT	AE250407
7531538	2025-06-24	1:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	1ST E ST	AE250407
7531539	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	BOILER R	AE250407
7531540	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	SE STOR	AE250407
7531541	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	COAL STC	AE250407
7531542	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	COAL DUF	AE250407
7531543	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	MEZZ	AE250407
7531544	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	MEZZ W S	AE250407
7531545	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	MEZZ E S	AE250407
7531546	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	P TRENCH	AE250407
7531547	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	FAN 115	AE250407
7531548	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	ELECTRIC	AE250407
7531549	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	MECH CA	AE250407
7531550	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	MEZZ SE	AE250407
7531551	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	MECH D3	AE250407
7531552	2025-06-24	2:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	MECH D3	AE250407
7531553	2025-06-24	3:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	UPPER G	AE250407
7531554	2025-06-24	3:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	200A	AE250407
7531555	2025-06-24	3:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	200B	AE250407
7531556	2025-06-24	3:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	200C	AE250407
7531557	2025-06-24	3:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	200D	AE250407
7531558	2025-06-24	3:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	200E	AE250407
7531559	2025-06-24	3:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	200F	AE250407
7531560	2025-06-24	3:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	200 COMM	AE250407
7531561	2025-06-24	3:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	208	AE250407
7531562	2025-06-24	3:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	208 DUP	AE250407
7531563	2025-06-24	3:00 pm	2025-06-24	11:00 am	70	AAPS	SLAUSON	203	AE250407
7531564	2025-06-24	3:00 pm	2025-06-24	12:00 pm	70	AAPS	SLAUSON	MC	AE250407

7531565	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	MC STOR	AE250407
7531566	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	MC LOUN	AE250407
7531567	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	MC BOOK	AE250407
7531568	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	205	AE250407
7531569	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	216	AE250407
7531570	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	218	AE250407
7531571	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	211	AE250407
7531572	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	211 DUP	AE250407
7531573	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	ILC OFFIC	AE250407
7531574	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	6/7 RES	AE250407
7531575	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	6 RES	AE250407
7531576	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	8 RES	AE250407
7531577	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	7/8 RES	AE250407
7531578	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	222	AE250407
7531579	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	224	AE250407
7531580	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	234	AE250407
7531581	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	226	AE250407
7531582	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	226 DUP	AE250407
7531583	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	228	AE250407
7531584	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	230	AE250407
7531585	2025-06-2	3:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	232	AE250407
7531586	2025-06-2	4:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	240	AE250407
7531587	2025-06-2	4:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	242	AE250407
7531588	2025-06-2	4:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	244	AE250407
7531589	2025-06-2	4:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	246	AE250407
7531590	2025-06-2	4:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	248	AE250407
7531591	2025-06-2	4:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	AUD	AE250407
7531592	2025-06-2	4:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	AUD DUP	AE250407
7531593	2025-06-2	4:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	MUSIC OF	AE250407
7531594	2025-06-2	4:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	M206	AE250407
7531595	2025-06-2	4:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	M210	AE250407
7531596	2025-06-2	4:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	M212	AE250407
7531597	2025-06-2	4:00 pm	2025-06-2	12:00 pm	70	AAPS	SLAUSON	M203	AE250407
7531598	2025-06-2	4:00 pm	2025-06-2	10:00 am	70	AAPS	SLAUSON	BLANK 1	AE250407
7531599	2025-06-2	4:00 pm	2025-06-2	10:00 am	70	AAPS	SLAUSON	BLANK 2	AE250407
7531600	2025-06-2	4:00 pm	2025-06-2	10:00 am	70	AAPS	SLAUSON	BLANK 3	AE250407
7531601	2025-06-2	4:00 pm	2025-06-2	10:00 am	70	AAPS	SLAUSON	BLANK 4	AE250407
7531602	2025-06-2	4:00 pm	2025-06-2	10:00 am	70	AAPS	SLAUSON	BLANK 5	AE250407
11566190	2025-06-2	11:00 am	2025-06-2	10:00 am	70	AAPS	SLAUSON	KILN ROO	AE250407
11566191	2025-06-2	11:00 am	2025-06-2	10:00 am	70	AAPS	SLAUSON	ART 136	AE250407
11566192	2025-06-2	11:00 am	2025-06-2	10:00 am	70	AAPS	SLAUSON	136 OFFIC	AE250407
11566193	2025-06-2	11:00 am	2025-06-2	10:00 am	70	AAPS	SLAUSON	ART 138	AE250407
11566194	2025-06-2	11:00 am	2025-06-2	11:00 am	70	AAPS	SLAUSON	ROOM 12	AE250407
11566195	2025-06-2	11:00 am	2025-06-2	11:00 am	70	AAPS	SLAUSON	ROOM 12	AE250407
11566196	2025-06-2	11:00 am	2025-06-2	11:00 am	70	AAPS	SLAUSON	142 SHOP	AE250407
11566197	2025-06-2	11:00 am	2025-06-2	11:00 am	70	AAPS	SLAUSON	SHOP STC	AE250407
11566198	2025-06-2	11:00 am	2025-06-2	11:00 am	70	AAPS	SLAUSON	SHOP OFI	AE250407
11566199	2025-06-2	11:00 am	2025-06-2	11:00 am	70	AAPS	SLAUSON	OFFICE D	AE250407
11566200	2025-06-2	11:00 am	2025-06-2	11:00 am	70	AAPS	SLAUSON	ROOM 14	AE250407


Floor	Result	Variance	Analysis N	Analysis D	%Moisture	Street	City	State	ZIP
1	< 0.3	0.3		2025-06-3	8				
1	< 0.3	0.3		2025-06-3	8.1				
1	< 0.3	0.3		2025-06-3	7.3				
1	< 0.3	0.3		2025-06-3	7.4				
1	< 0.3	0.3		2025-06-3	8.9				
1	< 0.3	0.3		2025-06-3	6.6				
1	< 0.3	0.3		2025-06-3	8.8				
1	< 0.3	0.3		2025-06-3	9.3				
1	< 0.3	0.3		2025-06-3	8				
1	< 0.3	0.3		2025-06-3	6.6				
1	< 0.3	0.3		2025-06-3	8.2				
1	< 0.3	0.3		2025-06-3	7.3				
1	< 0.3	0.3		2025-06-3	8.8				
1	< 0.3	0.3		2025-06-3	11.4				
1	< 0.3	0.3		2025-06-3	15.9				
1	< 0.3	0.3		2025-06-3	14.8				
1	< 0.3	0.3		2025-06-3	11.4				
1	< 0.3	0.3		2025-06-3	9.4				
1	< 0.3	0.3		2025-06-3	10.2				
1	< 0.3	0.3		2025-06-3	7.5				
1	< 0.3	0.3		2025-06-3	9.4				
0	< 0.3	0.3		2025-06-3	12.3				
0	< 0.3	0.3		2025-06-3	12.7				
0	< 0.3	0.3		2025-06-3	11.3				
0	0.5	0.3		2025-06-3	10.8				
0	1.4	0.3		2025-06-3	10.6				
0	0.8	0.3		2025-06-3	12.7				
0	1	0.3		2025-06-3	11.6				
0	0.9	0.3		2025-06-3	12				
0	< 0.3	0.3		2025-06-3	16.3				
0	0.6	0.3		2025-06-3	13				
0	1	0.3		2025-06-3	12				
0	< 0.3	0.3		2025-06-3	7.9				
0	< 0.3	0.3		2025-06-3	8				
0	< 0.3	0.3		2025-06-3	8.2				
0	< 0.3	0.3		2025-06-3	9.3				
0	< 0.3	0.3		2025-06-3	10.2				
1	0.6	0.3		2025-06-3	6.7				
1	0.6	0.3		2025-06-3	6.6				
2	< 0.3	0.3		2025-06-3	9.6				
2	< 0.3	0.3		2025-06-3	6.6				
2	< 0.3	0.3		2025-06-3	5.9				
2	< 0.3	0.3		2025-06-3	6.6				
2	< 0.3	0.3		2025-06-3	8.9				
2	< 0.3	0.3		2025-06-3	5.8				
2	< 0.3	0.3		2025-06-3	6.7				
2	< 0.3	0.3		2025-06-3	8.7				
2	< 0.3	0.3		2025-06-3	8.1				
2	< 0.3	0.3		2025-06-3	9.9				
2	< 0.3	0.3		2025-06-3	8				
2	< 0.3	0.3		2025-06-3	5.9				

2	< 0.3	0.3	2025-06-30	5.9			
2	< 0.3	0.3	2025-06-30	5.8			
2	< 0.3	0.3	2025-06-30	5.1			
2	< 0.3	0.3	2025-06-30	5.8			
2	< 0.3	0.3	2025-06-30	7.9			
2	< 0.3	0.3	2025-06-30	8			
2	< 0.3	0.3	2025-06-30	7.3			
2	< 0.3	0.3	2025-06-30	7.9			
2	< 0.3	0.3	2025-06-30	5.9			
2	< 0.3	0.3	2025-06-30	7.2			
2	< 0.3	0.3	2025-06-30	5.9			
2	< 0.3	0.3	2025-06-30	7.5			
2	< 0.3	0.3	2025-06-30	8.6			
2	< 0.3	0.3	2025-06-30	8			
2	< 0.3	0.3	2025-06-30	8			
2	< 0.3	0.3	2025-06-30	6.6			
2	< 0.3	0.3	2025-06-30	8			
2	< 0.3	0.3	2025-06-30	8			
2	< 0.3	0.3	2025-06-30	7.9			
2	< 0.3	0.3	2025-06-30	6.7			
2	< 0.3	0.3	2025-06-30	5.7			
2	0.5	0.3	2025-06-30	6.6			
2	< 0.3	0.3	2025-06-30	7.3			
2	< 0.3	0.3	2025-06-30	9.3			
2	< 0.3	0.3	2025-06-30	8			
2	< 0.3	0.4	2025-06-30	4.4			
2	< 0.3	0.3	2025-06-30	10			
2	< 0.3	0.3	2025-06-30	8			
2	< 0.3	0.3	2025-06-30	7.4			
2	< 0.3	0.3	2025-06-30	8.7			
2	< 0.3	0.3	2025-06-30	8.9			
2	< 0.3	0.3	2025-06-30	8.7			
2	< 0.3	0.3	2025-06-30	7.3			
3	< 0.3	0.3	2025-06-30	2.8			
3	< 0.3	0.3	2025-06-30	2.8			
3	< 0.3	0.3	2025-06-30	2			
3	< 0.3	0.3	2025-06-30	2.1			
3	< 0.3	0.3	2025-06-30	2.8			
1	< 0.3	0.3	2025-06-30	7.5			
1	< 0.3	0.3	2025-06-30	8.9			
1	< 0.3	0.3	2025-06-30	8.2			
1	< 0.3	0.3	2025-06-30	8.9			
1	< 0.3	0.3	2025-06-30	8.9			
1	< 0.3	0.3	2025-06-30	7.5			
1	< 0.3	0.3	2025-06-30	8.2			
1	< 0.3	0.3	2025-06-30	8.9			
1	< 0.3	0.3	2025-06-30	6			
1	< 0.3	0.3	2025-06-30	6.8			
1	< 0.3	0.3	2025-06-30	8.9			



Attachment B
Sample Location Maps

X = SAMPLE LOCATION

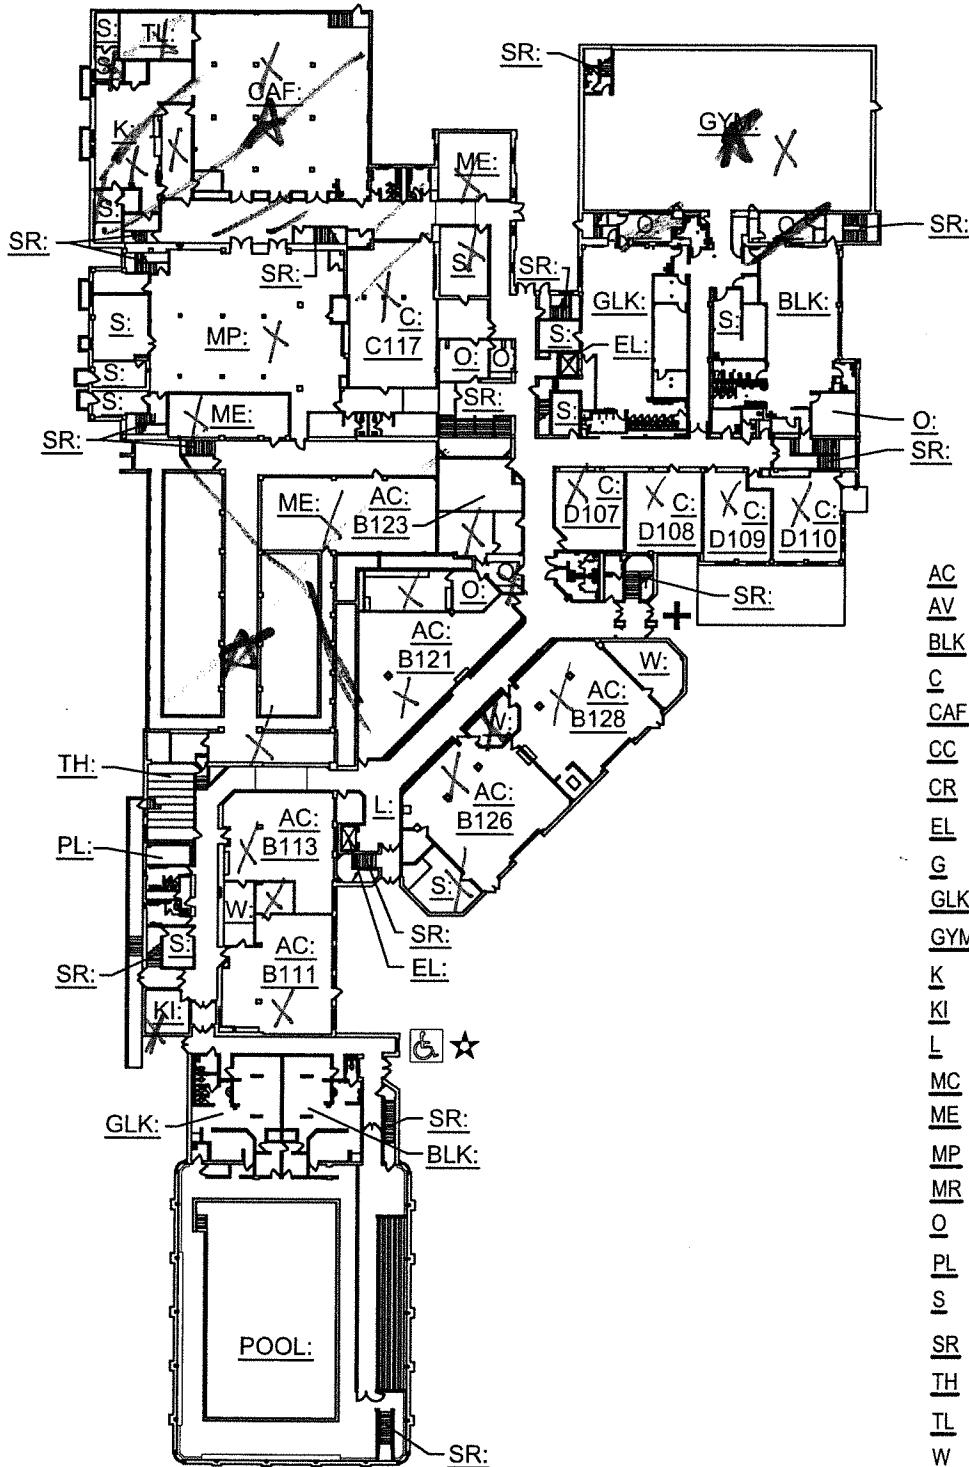

- AC : ART CLASSROOM
- AV : AUDIO/VISUAL
- BLK : BOYS LOCKER ROOM
- C : CLASSROOM
- CAF : CAFETERIA
- CC : CLINIC
- CR : COMPUTER LAB
- EL : ELEVATOR
- G : GENERAL OFFICE
- GLK : GIRLS LOCKER ROOM
- GYM : GYMNASIUM
- K : KITCHEN
- KI : KILN
- L : LOBBY
- MC : MEDIA CENTER
- ME : MECHANICAL ROOM
- MP : MULTIPURPOSE ROOM
- MR : MUSIC ROOM
- O : OFFICE
- PL : PLATFORM
- S : STORAGE
- SR : STAIRS
- TH : THEATER
- TL : TEACHER LOUNGE
- W : WORKROOM
-  : BARRIER-FREE ENTRANCE

- ★ : KEYPAD DOOR ACCESS
- ✚ : PROX READER DOOR ACCESS


FIRST FLOOR PLAN


Slauson Middle School
Ann Arbor Public Schools

Mitchell and Mouat Architects

0 64
SCALE: FEET

FEBRUARY 2013



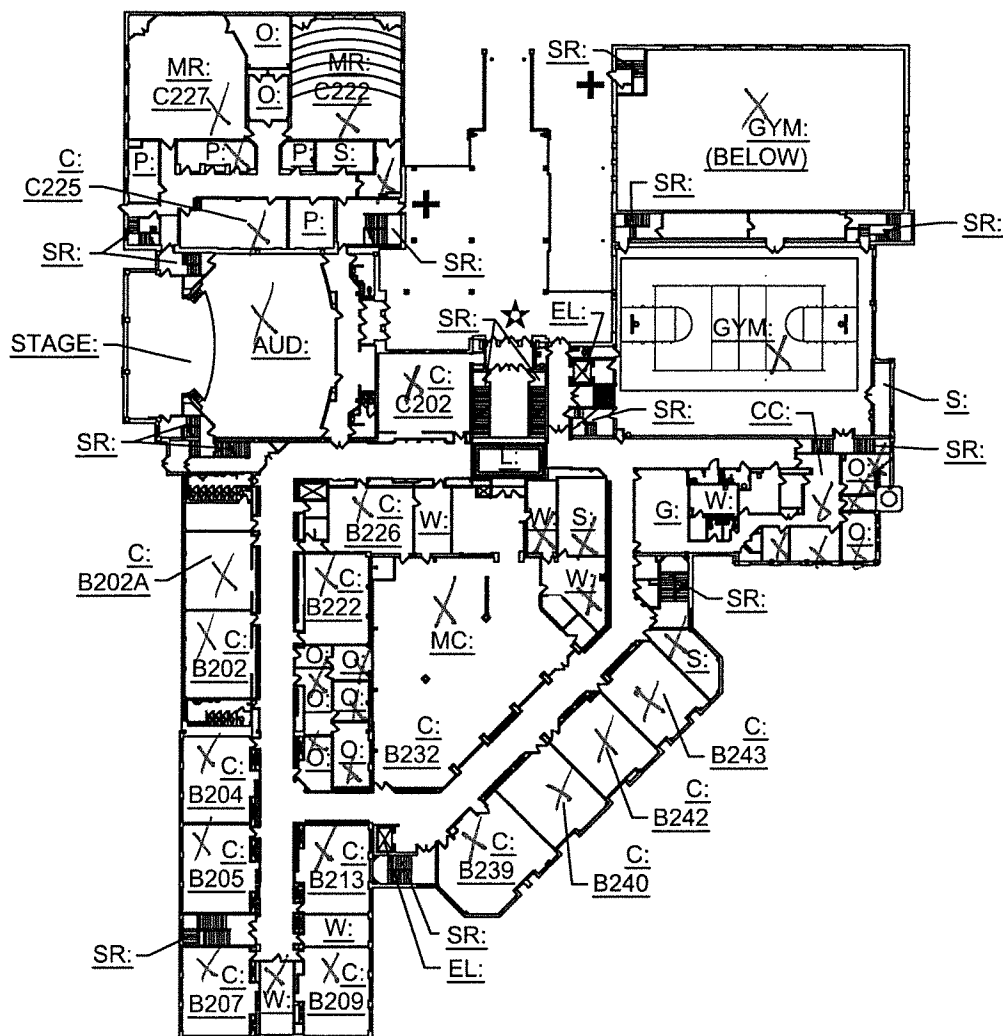

- AC : ART CLASSROOM
- AV : AUDIO/VISUAL
- AUD : AUDITORIUM
- BLK : BOYS LOCKER ROOM
- C : CLASSROOM
- CAF : CAFETERIA
- CC : CLINIC
- CR : COMPUTER LAB
- EL : ELEVATOR
- G : GENERAL OFFICE
- GLK : GIRLS LOCKER ROOM
- GYM : GYMNASIUM
- K : KITCHEN
- KI : KILN
- L : LOBBY
- MC : MEDIA CENTER
- ME : MECHANICAL ROOM
- MP : MULTIPURPOSE ROOM
- MR : MUSIC ROOM
- O : OFFICE
- P : PRACTICE ROOM
- PL : PLATFORM
- S : STORAGE
- SR : STAIRS
- TH : THEATER
- TL : TEACHER LOUNGE
- W : WORKROOM

X = SAMPLE LOCATION

-  : BARRIER-FREE ENTRANCE
- ☆ : KEYPAD DOOR ACCESS
- ⊕ : PROX READER DOOR ACCESS

SECOND FLOOR PLAN

Slauson Middle School

Ann Arbor Public Schools

Mitchell and Mouat Architects

0 64
SCALE: FEET

FEBRUARY 2013

