



December 2, 2025

Mr. Jason Bing, RA, LEED AP
Director, Capital Programs
Ann Arbor Public Schools
2555 South State Street
Ann Arbor, MI 48104
BingJ@aaps.k12.mi.us

RE: AEG Project #AE251037
Radon Sampling Services
Ann Arbor Public Schools, Mitchell Elementary School

Dear Mr. Bing:

Pursuant to the request of Ann Arbor Public Schools, Arch Environmental Group, Inc. (AEG) placed short-term radon detectors throughout frequently occupied locations at ground level or lower throughout Mitchell Elementary School. The detectors were placed in the facility on November 17, 2025 and were retrieved on November 20, 2025. Samples were analyzed by Air Chek, Inc. located in Mills River, North Carolina.

I. Introduction

The U.S. Environmental Protection Agency (EPA) and other major national and international scientific organizations have concluded that radon is a human carcinogen and a serious environmental health problem. Radon is a naturally occurring radioactive gas. It comes from the natural breakdown (decay) of uranium which is found in soil and rock all over the United States. Radon travels through soil and enters buildings through cracks and other holes in the foundation. Eventually it decays into radioactive particles (decay products) that can become trapped in your lungs when you breathe. As these particles in turn decay, they release small bursts of radiation. The radiation can damage lung tissue and lead to lung cancer over the course of your lifetime. Radon is colorless, odorless, and tasteless. The only way to know whether or not elevated levels of radon are present in a location is to test.

There are two ways to test for radon:

1. A **short-term test** is the quickest test for radon. In this test the device remains in the room for a period of **2 to 90 days** depending on the device.
2. A **long-term test** remains in place for more than 90 days.

The EPA recommends that action should be taken when radon levels are found to be 4pCi/L (Pico Curies per Liter of air) or higher.

II. Sampling Analysis & Strategies

In an effort to determine the radon levels throughout frequently occupied areas at ground level or lower, Arch Environmental Group, Inc. deposited short-term, activated charcoal adsorption devices (AC) in seventy-one locations in Mitchell Elementary School.

Activated charcoal adsorption devices (ACs) are a passive detector system for the measurement of radon concentrations in the air. Once the detector is opened, radon gas diffuses passively onto the activated charcoal and radon concentration is determined. ACs are passive devices. The charcoal within these devices has been treated to increase its ability to adsorb gases. The passive nature of the activated charcoal allows continual adsorption and desorption of radon. During the entire measurement period (typically two to seven days), the adsorbed radon undergoes radioactive decay. AEG deposited the AC detectors on November 17, 2025. The detectors were placed between knee and shoulder height on a flat or hanging surface. Additionally, the detectors were placed at least 1 foot from exterior walls, 3 feet from windows or doors, away from direct sunlight and away from heat vents. After a designated time, the samples were retrieved on November 20, 2025; the AC detectors were closed and collected for laboratory analysis. Duplicate samples and blank samples necessary for quality assurance purposes were also collected at the facility. Two samples were missing during sample retrieval; Sample #12268008 collected in Suite 11B and Sample #12268065 collected in Room 25.

As the sample results shown in *Attachment A* indicate, thirty-one of seventy-one sample locations identified radon concentrations at or above the EPA recommended “action level” of 4.0 pCi/L with sample results ranging from 4.0 pCi/L to 20.0 pCi/L. The sample locations and reported concentration are as follows:

- Main Office – 4.2 pCi/L
- Principal’s Office – 4.7 pCi/L
- Clinic – 5.3 pCi/L
- Office Copy – 4.3 pCi/L
- Psychologist’s Office – 5.5 pCi/L
- Teacher’s Lounge – 5.5 pCi/L
- Green Relax Room – 4.3 pCi/L
- Suite 11 Commons – 4.0 pCi/L
- Suite 11A – 4.1 pCi/L
- Suite 11D – 4.1 pCi/L
- Suite 11E – 7.0 pCi/L
- Media Center – 5.9 pCi/L
- Media Center Office – 4.9 pCi/L
- Media Center North Storage – 8.7 pCi/L
- Room 16 Storage – 4.0 pCi/L
- Multi-Purpose Room – 5.4 pCi/L
- Stage – 4.0 pCi/L
- Chair Storage – 5.1 pCi/L
- Room 20 – 4.7 pCi/L
- Room 1 – 5.0 pCi/L
- Room 2 – 6.2 pCi/L
- Room 21 – 20.0 pCi/L
- Collaboration Room #1 – 13.4 pCi/L
- Room 22 – 11.3 pCi/L
- Room 23 – 6.2 pCi/L
- Room 24 – 4.2 pCi/L
- Room 26 – 4.7 pCi/L
- Room 3 – 5.7 pCi/L
- Room 4 – 5.4 pCi/L
- Room 5 – 4.4 pCi/L
- Room 6 – 4.8 pCi/L

Prudent practice recommends that areas where radon levels are potentially above the “action level” should be retested with a second short-term test to confirm the results of the initial test. A second test above the “action level” recommends either progressing to a long-term test of at least 90 days or taking corrective measures to reduce levels below the “action level”.

III. Conclusions

Pursuant to the request of Ann Arbor Public Schools, Arch Environmental Group, Inc. collected radon samples from frequently occupied areas throughout Mitchell Elementary School. In accordance with the guidance document titled “Radon Measurements in Schools, Revised Edition (EPA 402-R-92-014, July 1993)” published by the U.S. Environmental Protection Agency, “...the EPA has conducted extensive research on the presence and measurement of radon in schools. Initial reports from some of those studies prompted the Administrator in 1989 to recommend that schools nationwide be tested for the presence of radon. Based on more recent findings, EPA continues to advise U.S. schools to test for radon and to reduce levels to below 4pCi/L.” Following some of the sampling recommendations offered by this guidance document, Arch Environmental Group, Inc.’s samples identified 31 of 71 collected sample locations above the action level of 4 pCi/L.

In accordance with accepted sampling protocols, AEG recommends a second short-term test in thirty-one locations with radon concentrations at or above the action level. In addition, AEG recommends additional sampling in Suite 11B and Room 25 where samples were missing during sample retrieval. AEG anticipates the second testing will be completed by December 19, 2025.

The EPA suggests that schools retest sometime in the future, especially after significant changes to the building structure or the HVAC system.

If you have any question regarding this information or work performed by Arch Environmental Group, Inc., please feel free to contact me at (248) 426-0165 “330” [office] or (248) 252-3618 [mobile].

Sincerely,

HealthAIR
A Division of arch environmental group



Philip E. Grosse
Project Consultant III



Attachment A
Official Laboratory Results

Radon test result report for:**AAPS
MITCHELL ES**

Kit #	Room Id	Started	Ended	pCi/L	Analyzed
12268056	1	2025-11-17 @ 7:00 pm	2025-11-20 @ 6:00 pm	5.0 ± 0.4	2025-11-24
12268004	10	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	1.0 ± 0.4	2025-11-24
12268006	11 COMMONS	2025-11-17 @ 5:00 pm	2025-11-20 @ 5:00 pm	3.6 ± 0.4	2025-11-24
12268007	11A	2025-11-17 @ 5:00 pm	2025-11-20 @ 5:00 pm	3.7 ± 0.4	2025-11-24
12268009	11C	2025-11-17 @ 5:00 pm	2025-11-20 @ 5:00 pm	2.1 ± 0.3	2025-11-24
12268010	11D	2025-11-17 @ 5:00 pm	2025-11-20 @ 5:00 pm	4.1 ± 0.4	2025-11-24
12268011	11E	2025-11-17 @ 5:00 pm	2025-11-20 @ 5:00 pm	6.9 ± 0.5	2025-11-24
12268012	11E DUP	2025-11-17 @ 5:00 pm	2025-11-20 @ 5:00 pm	7.1 ± 0.6	2025-11-24
12268013	11F	2025-11-17 @ 5:00 pm	2025-11-20 @ 5:00 pm	3.0 ± 0.4	2025-11-24
12268026	14	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	2.7 ± 0.4	2025-11-24
12268027	14 STORAGE	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	1.8 ± 0.3	2025-11-24
12268028	15	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	2.2 ± 0.4	2025-11-24
12268029	15 STORAGE	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	2.2 ± 0.3	2025-11-24
12268030	16	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	3.3 ± 0.4	2025-11-24
12268031	16 STO.	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	4.0 ± 0.4	2025-11-24
12268032	16 STO. DUP	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	4.0 ± 0.4	2025-11-24
12268050	18 CONF.	2025-11-17 @ 7:00 pm	2025-11-20 @ 6:00 pm	2.7 ± 0.3	2025-11-24
12268054	19	2025-11-17 @ 7:00 pm	2025-11-20 @ 6:00 pm	2.7 ± 0.3	2025-11-24
12268057	2	2025-11-17 @ 7:00 pm	2025-11-20 @ 6:00 pm	6.2 ± 0.5	2025-11-24
12268055	20	2025-11-17 @ 7:00 pm	2025-11-20 @ 6:00 pm	4.7 ± 0.4	2025-11-24
12268058	21	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	20.0 ± 1.6	2025-11-24
12268060	22	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	11.3 ± 0.9	2025-11-24
12268061	23	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	6.3 ± 0.5	2025-11-24
12268062	23 DUP	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	6.1 ± 0.5	2025-11-24
12268064	24	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	3.8 ± 0.4	2025-11-24
12268066	26	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	4.7 ± 0.5	2025-11-24
12268067	3	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	5.7 ± 0.5	2025-11-24
12268068	4	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	5.4 ± 0.4	2025-11-24
12268069	5	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	4.4 ± 0.4	2025-11-24
12268070	6	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	4.7 ± 0.4	2025-11-24
12268071	6 DUP	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	4.9 ± 0.4	2025-11-24
12268000	7	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	0.6 ± 0.4	2025-11-24
12268001	8	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	0.8 ± 0.4	2025-11-24
12268002	8 DUP	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	1.0 ± 0.3	2025-11-24
12268003	9	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	1.0 ± 0.3	2025-11-24
12268014	ART	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	1.4 ± 0.3	2025-11-24
12268016	ART OFFICE	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	1.4 ± 0.3	2025-11-24

Radon test result report for:**AAPS
MITCHELL ES**

Kit #	Room Id	Started	Ended	pCi/L	Analyzed
12268072	BLANK 1	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	< 0.3	2025-11-24
12268073	BLANK 2	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	< 0.3	2025-11-24
12268074	BLANK 3	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	< 0.3	2025-11-24
12268075	BLANK 4	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	< 0.3	2025-11-24
12268017	BLUE ROOM	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	2.6 ± 0.4	2025-11-24
12268051	BOILER	2025-11-17 @ 7:00 pm	2025-11-20 @ 6:00 pm	0.6 ± 0.3	2025-11-24
12268052	BOILER DUP	2025-11-17 @ 7:00 pm	2025-11-20 @ 6:00 pm	0.5 ± 0.3	2025-11-24
12268049	CHAIR STO	2025-11-17 @ 7:00 pm	2025-11-20 @ 6:00 pm	5.1 ± 0.5	2025-11-24
12267995	CLINIC	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	5.3 ± 0.4	2025-11-24
12268059	COLLAB 1	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	13.4 ± 1.1	2025-11-24
12267997	COMMUNITY	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	0.8 ± 0.3	2025-11-24
12268053	CUST. OFF	2025-11-17 @ 7:00 pm	2025-11-20 @ 6:00 pm	0.7 ± 0.3	2025-11-24
12268063	ELT OFFICE	2025-11-17 @ 7:00 pm	2025-11-20 @ 7:00 pm	3.4 ± 0.4	2025-11-24
12268045	FLEX	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	0.9 ± 0.3	2025-11-24
12268005	GREEN RELAX	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	3.9 ± 0.4	2025-11-24
12268019	GYM	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	1.9 ± 0.4	2025-11-24
12268018	GYM OFFICE	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	1.1 ± 0.3	2025-11-24
12268020	GYM STO.	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	2.6 ± 0.4	2025-11-24
12268015	KILN	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	2.2 ± 0.3	2025-11-24
12267999	LOUNGE	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	5.5 ± 0.4	2025-11-24
12267993	MAIN OFF	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	4.2 ± 0.4	2025-11-24
12268021	MC	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	7.0 ± 0.6	2025-11-24
12268022	MC DUP	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	4.8 ± 0.4	2025-11-24
12268024	MC N. STO	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	8.7 ± 0.7	2025-11-24
12268023	MC OFFICE	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	4.9 ± 0.4	2025-11-24
12268025	MC S. STO	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	3.5 ± 0.4	2025-11-24
12268047	MPR	2025-11-17 @ 7:00 pm	2025-11-20 @ 6:00 pm	5.4 ± 0.4	2025-11-24
12268039	NEST	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	0.6 ± 0.3	2025-11-24
12268038	OFF BY P5	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	0.6 ± 0.3	2025-11-24
12267996	OFF. COPY	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	4.3 ± 0.4	2025-11-24
12268033	PORT 1	2025-11-17 @ 6:00 pm	2025-11-20 @ 5:00 pm	< 0.3	2025-11-24
12268043	PORT 10	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	< 0.3	2025-11-24
12268034	PORT 2	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	< 0.3	2025-11-24
12268036	PORT 3	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	< 0.3	2025-11-24
12268035	PORT 4	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	0.6 ± 0.3	2025-11-24
12268037	PORT 5	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	0.8 ± 0.3	2025-11-24
12268046	PORT 6	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	< 0.3	2025-11-24

November 24, 2025

**** LABORATORY ANALYSIS REPORT ****

Radon test result report for:

**AAPS
MITCHELL ES**

Kit #	Room Id	Started	Ended	pCi/L	Analyzed
12268040	PORT 7	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	0.6 ± 0.3	2025-11-24
12268044	PORT 8	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	0.6 ± 0.3	2025-11-24
12268041	PORT 9	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	0.7 ± 0.3	2025-11-24
12268042	PORT 9 DUP	2025-11-17 @ 6:00 pm	2025-11-20 @ 6:00 pm	< 0.3	2025-11-24
12267994	PRINCIPAL	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	4.7 ± 0.4	2025-11-24
12267998	PSYCH	2025-11-17 @ 5:00 pm	2025-11-20 @ 4:00 pm	5.5 ± 0.4	2025-11-24
12268048	STAGE	2025-11-17 @ 7:00 pm	2025-11-20 @ 6:00 pm	4.0 ± 0.4	2025-11-24

Air Chek 1936 Butler Bridge Rd, Mills River, NC 28759-3892 Phone: (828) 684-0893 Fax: (828) 684-8498

Kit Number	Start Date	Start Time	End Date	End Time	Temperature	Facility	Building	Room	Project ID
12267993	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	MAIN OFF	AE251037
12267994	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	PRINCIPAL	AE251037
12267995	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	CLINIC	AE251037
12267996	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	OFF. COP	AE251037
12267997	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	COMMUN	AE251037
12267998	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	PSYCH	AE251037
12267999	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	LOUNGE	AE251037
12268000	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	7	AE251037
12268001	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	8	AE251037
12268002	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	8 DUP	AE251037
12268003	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	9	AE251037
12268004	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	10	AE251037
12268005	2025-11-1	5:00 pm	2025-11-2	4:00 pm	70	AAPS	MITCHELL	GREEN R	AE251037
12268006	2025-11-1	5:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	11 COMM	AE251037
12268007	2025-11-1	5:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	11A	AE251037
12268009	2025-11-1	5:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	11C	AE251037
12268010	2025-11-1	5:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	11D	AE251037
12268011	2025-11-1	5:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	11E	AE251037
12268012	2025-11-1	5:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	11E DUP	AE251037
12268013	2025-11-1	5:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	11F	AE251037
12268014	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	ART	AE251037
12268015	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	KILN	AE251037
12268016	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	ART OFFI	AE251037
12268017	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	BLUE RO	AE251037
12268018	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	GYM OFF	AE251037
12268019	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	GYM	AE251037
12268020	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	GYM STO	AE251037
12268021	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	MC	AE251037
12268022	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	MC DUP	AE251037
12268023	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	MC OFFIC	AE251037
12268024	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	MC N. ST	AE251037
12268025	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	MC S. ST	AE251037
12268026	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	14	AE251037
12268027	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	14 STORA	AE251037
12268028	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	15	AE251037
12268029	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	15 STORA	AE251037
12268030	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	16	AE251037
12268031	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	16 STO.	AE251037
12268032	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	16 STO. D	AE251037
12268033	2025-11-1	6:00 pm	2025-11-2	5:00 pm	70	AAPS	MITCHELL	PORT 1	AE251037
12268034	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	PORT 2	AE251037
12268035	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	PORT 4	AE251037
12268036	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	PORT 3	AE251037
12268037	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	PORT 5	AE251037
12268038	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	OFF BY P	AE251037
12268039	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	NEST	AE251037
12268040	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	PORT 7	AE251037
12268041	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	PORT 9	AE251037
12268042	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	PORT 9 D	AE251037
12268043	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	PORT 10	AE251037
12268044	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	PORT 8	AE251037

12268045	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	FLEX	AE251037
12268046	2025-11-1	6:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	PORT 6	AE251037
12268047	2025-11-1	7:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	MPR	AE251037
12268048	2025-11-1	7:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	STAGE	AE251037
12268049	2025-11-1	7:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	CHAIR ST	AE251037
12268050	2025-11-1	7:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	18 CONF.	AE251037
12268051	2025-11-1	7:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	BOILER	AE251037
12268052	2025-11-1	7:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	BOILER D	AE251037
12268053	2025-11-1	7:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	CUST. OF	AE251037
12268054	2025-11-1	7:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	19	AE251037
12268055	2025-11-1	7:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	20	AE251037
12268056	2025-11-1	7:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	1	AE251037
12268057	2025-11-1	7:00 pm	2025-11-2	6:00 pm	70	AAPS	MITCHELL	2	AE251037
12268058	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	21	AE251037
12268059	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	COLLAB 1	AE251037
12268060	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	22	AE251037
12268061	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	23	AE251037
12268062	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	23 DUP	AE251037
12268063	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	ELT OFFIC	AE251037
12268064	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	24	AE251037
12268066	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	26	AE251037
12268067	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	3	AE251037
12268068	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	4	AE251037
12268069	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	5	AE251037
12268070	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	6	AE251037
12268071	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	6 DUP	AE251037
12268072	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	BLANK 1	AE251037
12268073	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	BLANK 2	AE251037
12268074	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	BLANK 3	AE251037
12268075	2025-11-1	7:00 pm	2025-11-2	7:00 pm	70	AAPS	MITCHELL	BLANK 4	AE251037

Floor	Result	Variance	Analysis N	Analysis D	%Moisture	Street	City	State	ZIP
1	4.2	0.4		2025-11-24	2				
1	4.7	0.4		2025-11-24	2				
1	5.3	0.4		2025-11-24	1.2				
1	4.3	0.4		2025-11-24	2.9				
1	0.8	0.3		2025-11-24	1.2				
1	5.5	0.4		2025-11-24	2				
1	5.5	0.4		2025-11-24	2.9				
1	0.6	0.4		2025-11-24	1.2				
1	0.8	0.4		2025-11-24	2.1				
1	1	0.3		2025-11-24	2				
1	1	0.3		2025-11-24	1.2				
1	1	0.4		2025-11-24	2				
1	3.9	0.4		2025-11-24	1.2				
1	3.6	0.4		2025-11-24	2				
1	3.7	0.4		2025-11-24	2.8				
1	2.1	0.3		2025-11-24	1.2				
1	4.1	0.4		2025-11-24	1.2				
1	6.9	0.5		2025-11-24	2				
1	7.1	0.6		2025-11-24	2				
1	3	0.4		2025-11-24	2				
1	1.4	0.3		2025-11-24	2				
1	2.2	0.3		2025-11-24	2				
1	1.4	0.3		2025-11-24	2				
1	2.6	0.4		2025-11-24	1.2				
1	1.1	0.3		2025-11-24	2.1				
1	1.9	0.4		2025-11-24	1.2				
1	2.6	0.4		2025-11-24	2				
1	7	0.6		2025-11-24	1.2				
1	4.8	0.4		2025-11-24	1.2				
1	4.9	0.4		2025-11-24	2				
1	8.7	0.7		2025-11-24	1.2				
1	3.5	0.4		2025-11-24	1.2				
1	2.7	0.4		2025-11-24	1.2				
1	1.8	0.3		2025-11-24	1.2				
1	2.2	0.4		2025-11-24	2.8				
1	2.2	0.3		2025-11-24	2				
1	3.3	0.4		2025-11-24	1.2				
1	4	0.4		2025-11-24	2.8				
1	4	0.4		2025-11-24	2.8				
0	< 0.3	0.3		2025-11-24	2				
1	< 0.3	0.3		2025-11-24	2				
1	0.6	0.3		2025-11-24	1.2				
1	< 0.3	0.3		2025-11-24	2				
1	0.8	0.3		2025-11-24	1.2				
1	0.6	0.3		2025-11-24	1.2				
1	0.6	0.3		2025-11-24	2				
1	0.6	0.3		2025-11-24	2				
1	0.7	0.3		2025-11-24	1.2				
1	< 0.3	0.3		2025-11-24	2				
1	< 0.3	0.4		2025-11-24	2				
1	0.6	0.3		2025-11-24	2				

1	0.9	0.3	2025-11-24	2.8				
1	< 0.3	0.3	2025-11-24	2				
1	5.4	0.4	2025-11-24	2				
1	4	0.4	2025-11-24	2.8				
1	5.1	0.5	2025-11-24	2				
1	2.7	0.3	2025-11-24	2				
1	0.6	0.3	2025-11-24	2				
1	0.5	0.3	2025-11-24	1.2				
1	0.7	0.3	2025-11-24	1.2				
1	2.7	0.3	2025-11-24	1.2				
1	4.7	0.4	2025-11-24	2				
1	5	0.4	2025-11-24	2				
1	6.2	0.5	2025-11-24	2.8				
1	20	1.6	2025-11-24	3.6				
1	13.4	1.1	2025-11-24	2.8				
1	11.3	0.9	2025-11-24	3.6				
1	6.3	0.5	2025-11-24	2.8				
1	6.1	0.5	2025-11-24	2				
1	3.4	0.4	2025-11-24	4.4				
1	3.8	0.4	2025-11-24	2.8				
1	4.7	0.5	2025-11-24	2.8				
1	5.7	0.5	2025-11-24	2				
1	5.4	0.4	2025-11-24	2				
1	4.4	0.4	2025-11-24	2.8				
1	4.7	0.4	2025-11-24	2.8				
1	4.9	0.4	2025-11-24	2.8				
3	< 0.3	0.4	2025-11-24	1.2				
3	< 0.3	0.4	2025-11-24	2				
3	< 0.3	0.4	2025-11-24	1.2				
3	< 0.3	0.4	2025-11-24	0.4				



Attachment B
Sample Location Maps

Mitchell Room Locations

MITCHELL STAFF
PARKING LOT

Suite 11

Sweet - Speech
Baldwin - RR
Halliburton - TC/RR
- SSW

Preschool

Y5/K/1

2/3

3/4

5

UM

Adult
restrooms

Gym
Rushdan

11

10

9

EXIT

EXIT

ELMAC enter here

12
Cerniglia
Art

courtyard

Culver X BLO
7 X
OT/Krawchuk
community
center X

FRONT
ENTRANCE

EXIT

6 X
Podajil
Preschool

5 X
Mayer
K

4 X
Mann 1st

1 X
Ireland
RR

2 X
Bolaños
K

3 X
Finkbelner
1st

media
center X
Schultze
Library

office X

multi-
purpose
room X

EXIT

21
Desai 2nd

26
Bell 3rd

25
Gebben
3rd X

Peoples
Office X

18 X
Conf rm

PLC Room
19

22
Woodson
2nd

23

24 X
Streeter
3rd

EL Office
Zechmeister X

13 X
IM/Mr. Tm

14 X
PLTW
Li

15 X
Spanish
Lubara-Steuer

16 X
Michael
Music

EXIT

EXIT

Thompson
Y5 20

AE 25/037

NOVEMBER 17-20, 2025

X = SAMPLE
LOCATION

Y = RADON ABOVE
ACTION LEVEL


0 X	8 X Arrowsmith 4th	6 X Swenson 4th	4 X Title I Canlon	2 X Nielsen 5th
9 X of M ELD	7 X	5 X Sheppard RR	3 X Fields 5th	1 X Spears 5th

Modular CLASSROOMS

SSW Office
Sarai

SCARLETT PARKING LOT

- PA: PUBLIC ADDRESS SYSTEM
 FA: FIRE ALARM CONTROL PANEL
 EP: MAIN ELECTRIC PANEL
 EM: ELECTRIC METER
 GM: GAS METER
 GS: GAS SHUT-OFF
 WM: WATER METER
 WS: WATER SHUT-OFF
 ⑥: SECURITY DOOR
 (NUMBERS VARY)
 ♿: BARRIER-FREE ENTRANCE

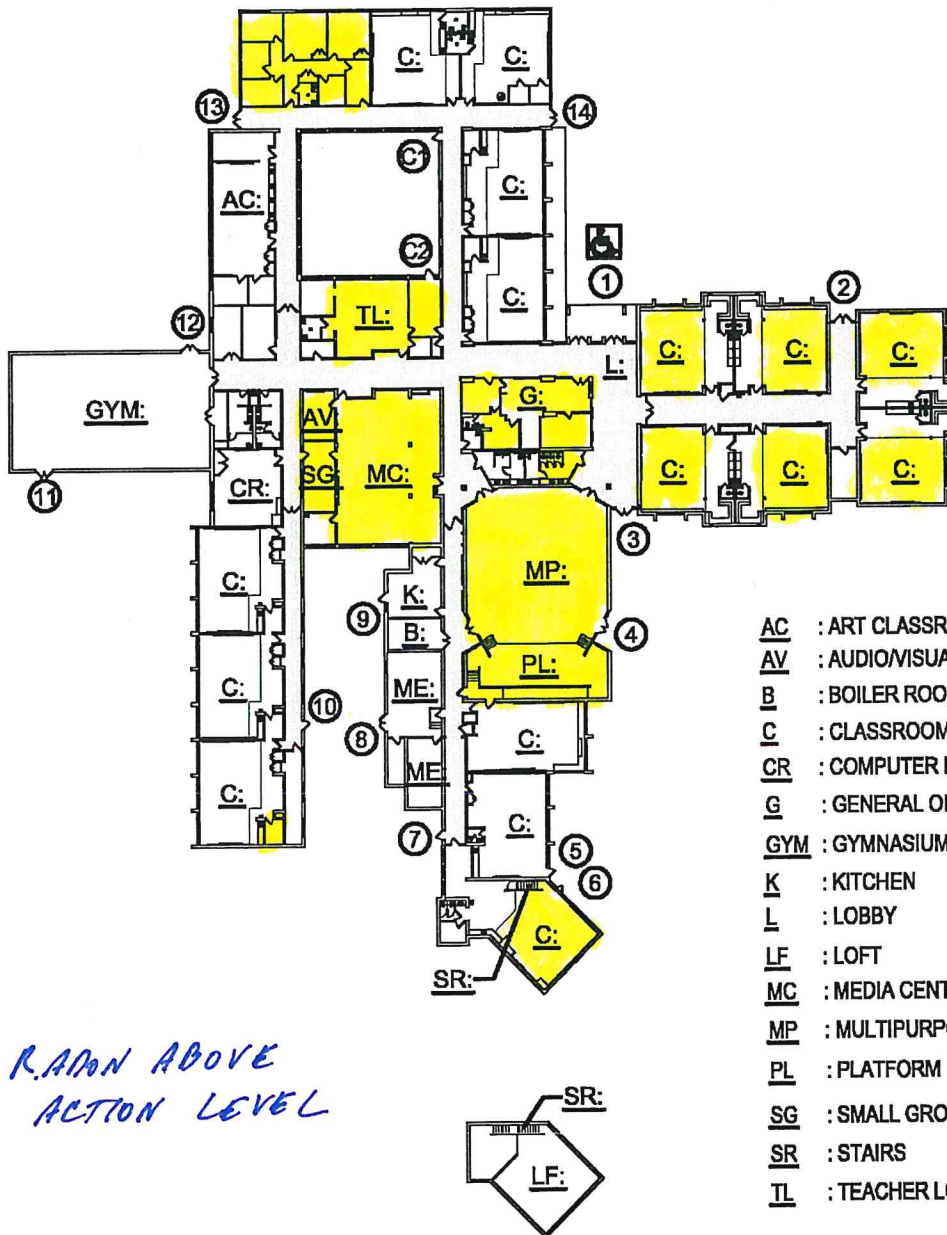

FIRST FLOOR PLAN CONTRACTOR EDITION

Mitchell Elementary School

Ann Arbor Public Schools

Mitchell and Mouat Architects

0 64
SCALE: FEET

NOVEMBER 2011